


# HANDICAP BASE SPECIFICATIONS - STANDARD & DOMESTIC

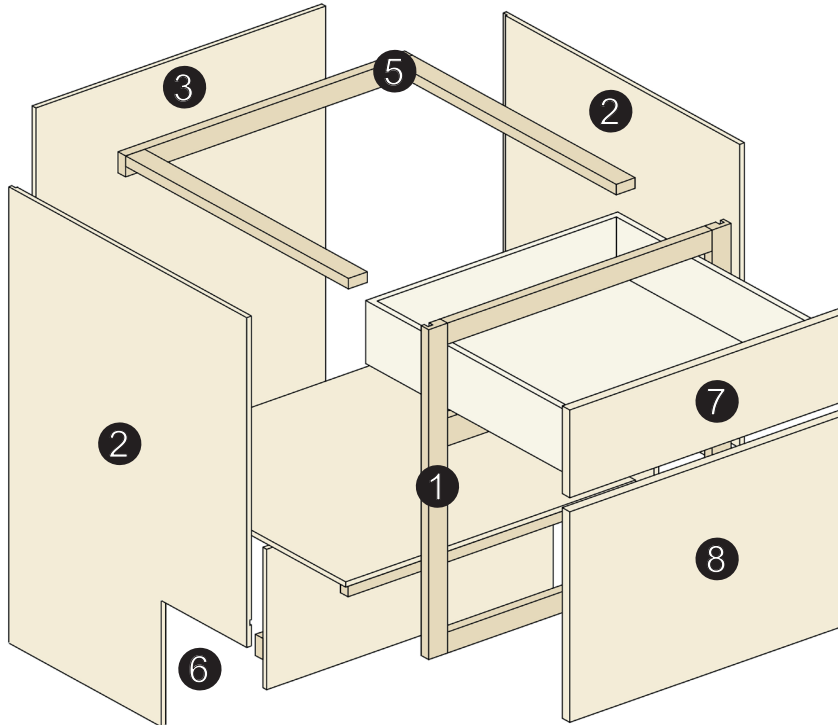

**HANDICAP BASE CABINET CONSTRUCTION (32½" Height)**  
STANDARD and **DOMESTIC Option**

- 1** Cabinet fronts
    - ¾" solid wood
    - Front stiles are pocket drilled and assembled with 1¼" screws for rugged durability
  - 2** Side panels
    - ¾" particle board
    - DOMESTIC Option: ¾" plywood**
    - Vinyl covered on both sides
    - Glued and stapled in a ¾" dado in the cabinet's front frame
  - 3** Back panels
    - ¾" particle board
    - DOMESTIC Option: ¾" plywood**
    - Vinyl covered on inside only
    - Glued and nailed in a ¾" dado and stapled to the hang rail and cabinet bottom
  - 4** Floor Panels
    - ¾" particle board
    - DOMESTIC Option: ¾" plywood**
    - Vinyl covered on inside only
  - 5** Hanging rails
    - ¾" x 1½" all wood
    - Installed on sides and back.
  - 6** Toe kick
    - Handicap (HH): 9" high x 9" deep
    - Handicap Accessible (HA): 5½" high x 4" deep
  - 7** Drawers
    - ½" MDF
    - NOTE: Cabinets 27" - 36" wide use ½" finished solid wood**
    - DOMESTIC Option: ½" finished solid wood**
    - Bullnose, foil-covered top edges
    - Dovetail construction
    - Drawers glide smoothly on self-adjusting ball bearing nylon guides
  - 8** Doors
    - Butt Doors: Standard on 27" - 36" wide cabinets; Available on 24"
    - Door Construction Specifications are on pages 16 and 17
- Shelves (*Handicap Accessible Only*)
- Fixed ½" MDF
  - DOMESTIC Option: Fixed ½" plywood**
  - Bullnose, foil-covered front edges

## Finish

All cabinet front and door surfaces receive stain and a catalyzed clear or a catalyzed paint finish. Our finish provides a deep, rich wood tone that is resistant to household chemicals, water, food stains and mild acids.

## Hinges

Hidden, self-closing adjustable hinge

## Optional Construction Features

- See page 6 for option details